


JTAG CPU

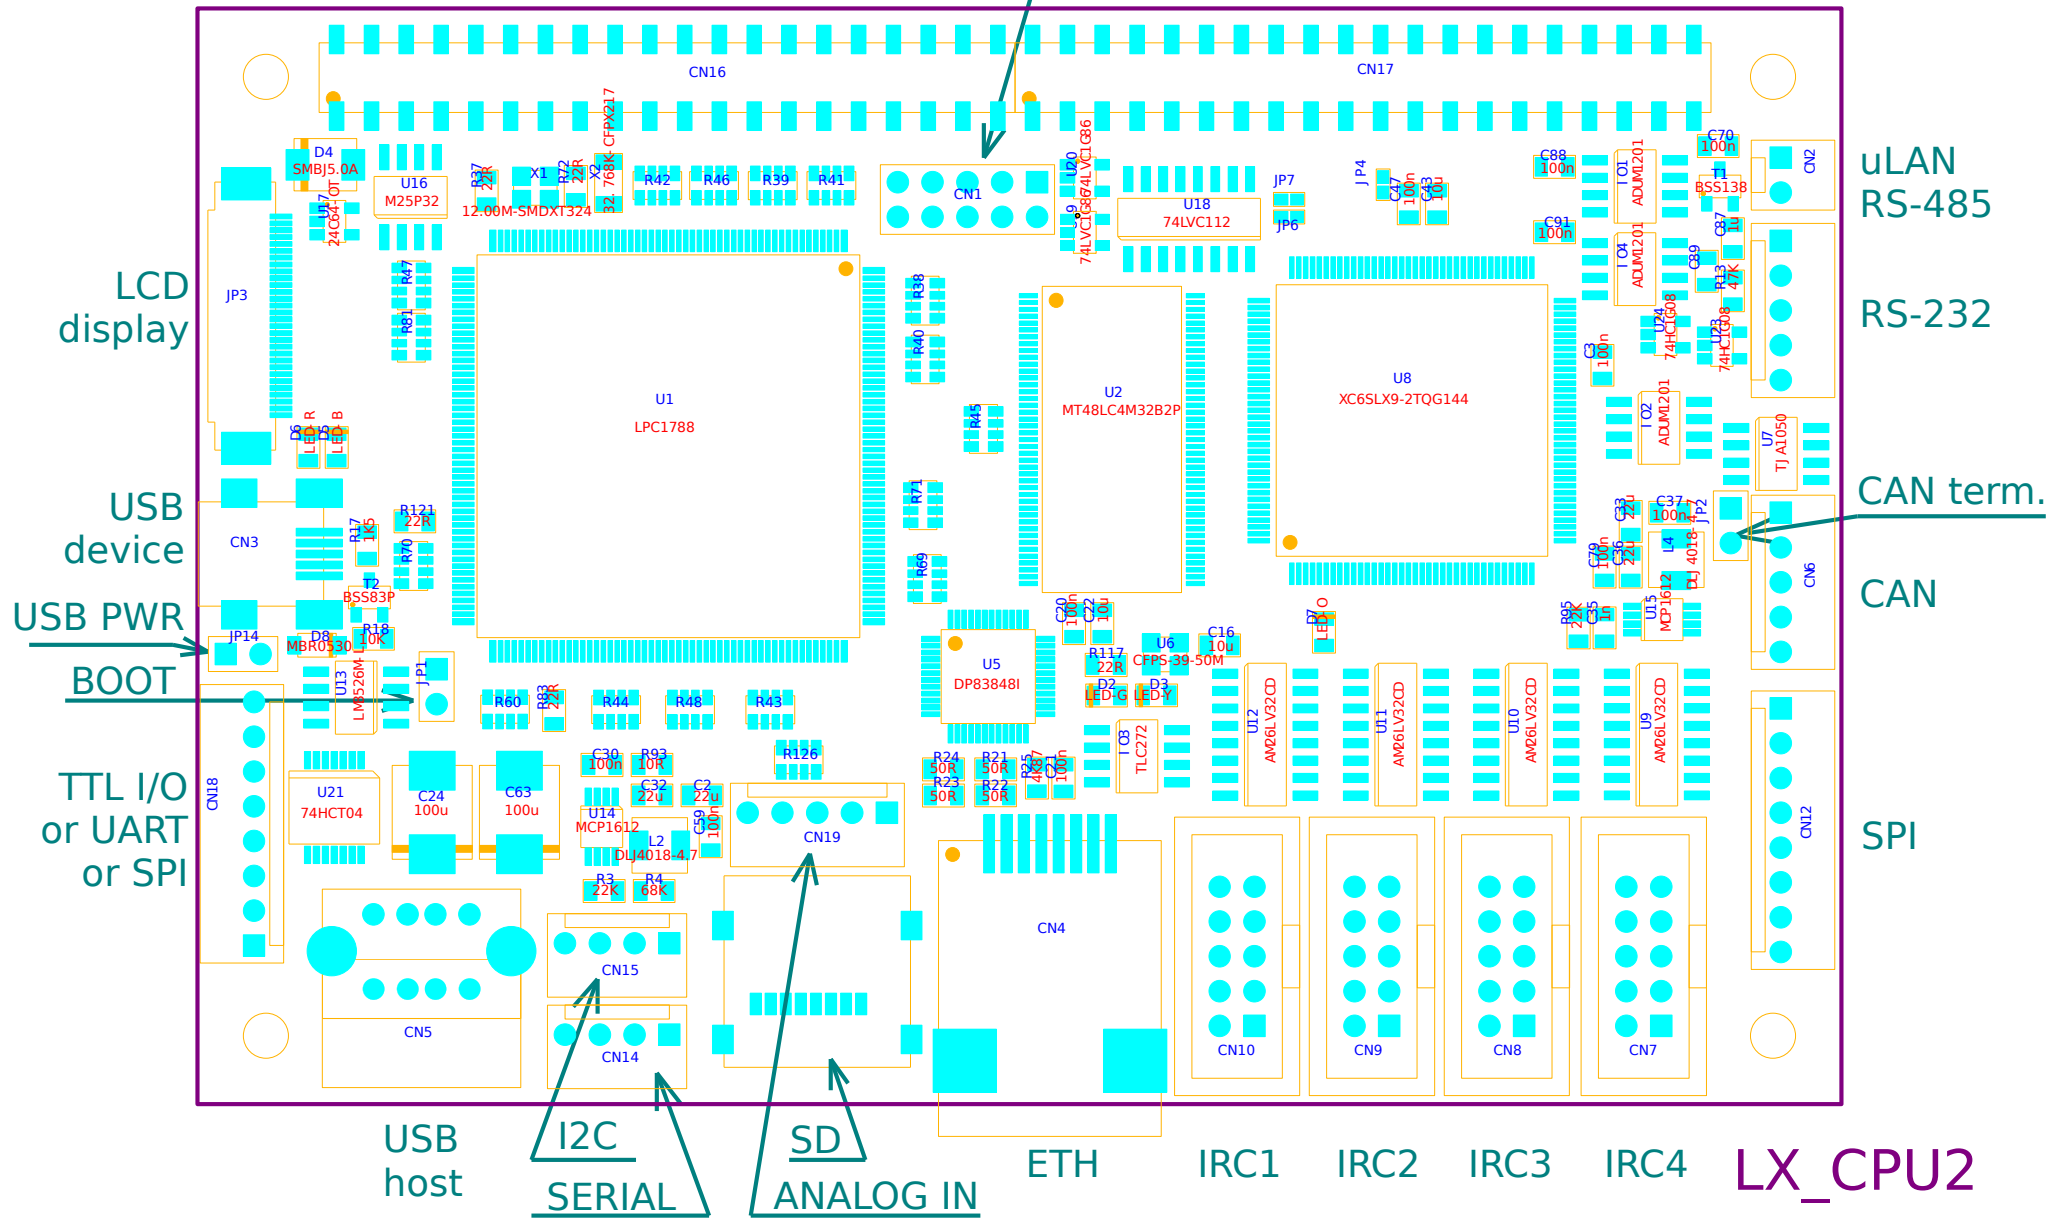

uLAN  
RS-485

RS-232

CAN term.

CAN

SPI

LCD  
display

USB  
device

USB PWR

BOOT

TTL I/O  
or UART  
or SPI

USB  
host

I2C  
SERIAL

SD  
ANALOG IN

ETH

IRC1

IRC2

IRC3

IRC4

LX\_CPU2